think globa





Effective July 2014 Princeton

Overview

Princeton is a freestanding and fully modular desking system offering maximum flexibility; ease of installation and facilitates simple reconfigurations. The overlapping worksurface design allows the footprint to adapt to smaller spaces by just a few inches. Every element, from the mix of materials and finishes to open storage pieces, floating modesties and overlapping surfaces, has been designed to provide visual appeal and intelligent function.

All Princeton components have been tested to comply with BIFMA table / desk and mechanical standards. Princeton has been tested using stringent environmental chamber methods and found to meet Greenguard's Indoor Air Quality standards. Greenguard certified products are low emitting and contribute minimal levels of pollutants to indoor environments www.greenguard.org. Princeton is BIFMA Level 3 certified.

Construction Specifications

WORKSURFACES

- Constructed of 45 lbs density particleboard core with high performance thermally fused laminate
- High pressure laminate tops are also available in all Princeton laminate finishes at an extended lead time. Please see model # for pricing and availability.
- Worksurfaces are 1" thick with 3mm thick matching edge detail on all sides
- Worksurfaces with metal legs which have a span of 54" and over include metal support channel(s)
 - 24" and 30" deep 1 support channel
 - 36" deep 2 support channels

GENERAL CONSTRUCTION

- Laminate end panel and metal leg products are not intended to be combined for the most visually compatible design. They are, however, interchangeable if required.
- · Components are constructed of 45 lbs density particleboard core with high performance thermally fused laminate
- End panels are 1.5" thick on laminate end panel desks and credenzas. Cabinet end panels are 11/16" thick.
- · All components other than worksurfaces have 1mm thick matching edge detail on all sides
- · Leveling glides are standard on all floor units with a minimum of 1" adjustability
- 1" x 2" metal frame legs finished in Tungsten (TUN) for desks and returns
- 1" x 2.5" metal frame legs finished in Tungsten (TUN) for freestanding tables
- Credenzas come standard with file bars for front-to-back letter, legal and A4 filing capability
- Laminate shelves are 11/16" thick and edged on all 4 sides. Optional tempered glass shelves are 6mm thick with satin-etched finish on one side.
- · Metal plates and wood screws are provided for connection between units
- · Counterweights are standard on all pedestals, lateral files, credenzas and cabinets
- · Mobile pedestals and mobile lateral files come standard with front locking casters
- · Stool and rolling table come standard with non-locking casters
- · Handles and pulls in satin anodized finish are standard on all credenza, pedestal drawers and cabinet doors
- · Pull-out equipment shelves are available on select credenzas
- · Grommets and power blocks are available to accommodate power/data needs

LOCKS

- Standard on all credenzas, storage cabinets, lateral files, pedestals and benches
- Lock on all credenzas, cabinets and pedestals is always positioned on the bottom file drawer
- Lock secures both bottom and drawer above that with the lock
- Storage cabinets and pedestals with box, box, file combination, only file drawer and lower box drawer are locking
- Components can be ordered without locks at no additional charge. Specify NL

PULLS

- 9.76" long
- Satin anodized finish only



Construction Specifications

TABLE LEGS

- 1"X 2.5" metal frame (open 'U' style)
- Finished in Tungsten (TUN) only

METAL LEG

- 1" X 2" open metal frame (closed '0' style)
- Finished in Tungsten (TUN) only
- Support for select desks and returns

MONOPOST


- Standard support for Conference tops
- 4" square post with 10" square base
- Finished in Tungsten (TUN) only

LAMINATE MODESTY PANELS

- 10" high. Standard on all desks with laminate end panels, returns with laminate end panels and bridges for laminate end panel desks
- · Modesty is flush on Freestanding Returns with laminate end panels
- Modesty is recessed 4" deep on 24"d desks with laminate end panels, 5" deep on 30"d desks with laminate end panels and 6" deep on 36"d desks with laminate end panels
- Modesty is recessed 4" deep on 24"d, 5" deep on 30"d and 6" deep on 36"d flush and overlapping returns with laminate end panels
- Modesty is recessed 4"d on 24"d and 5"d on 30"d flush and overlapping bridges with laminate end panels
- · Desks and returns feature modesty panel that is flush with end panel
- Bottom of wood modesty panel is 18" from floor


GROMMETS


- Worksurface grommet hole dimensions are 3.22" wide by 1.85" deep
- · One grommet in satin anodized finish is standard on many components
- Standard grommet position for desks, returns, bridges and conference tops is POG2
- Grommet location is 2" from edge to cut out on desks/returns/bridges and 2.5" from edge to cut out on credenzas
- Additional grommets are available in other standard worksurface locations (left, center or right) on select components; refer to price list for more information
- Grommets may be placed at non-standard locations, see price list for upcharge
- A drawing must be supplied with vertical and horizontal dimensions to the center of the cut-out (as in drawing below)
- · Components that come standard with grommet may be ordered without a grommet, upcharge applies

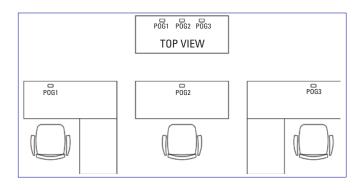

WIRE MANAGEMENT PASS-THROUGH

- Laminate modesty panels have a 3.43" wide by 2" high pass-through for cables/cords, excluding 27"h and 29"h freestanding returns
- Credenzas with open lower shelf, the center gable has a 4" x 4" cut out allowing cables to pass through and exit the bottom of the unit to floor mounted power/data
- 2" deep x 2" high extruded wire management channel in several lengths is available for management of cables below the worksurface
- Channel readily flexes to receive and then secure electrical and data wires
- · Quickly attaches with double-sided tape (included)







Construction Specifications

CREDENZA WITH PULL-OUT EQUIPMENT SHELF

- Select credenzas have the option of a pull-out equipment shelf
- Shelf is rated for up to 80 lbs.

GLASS

• All glass components (desktop panels, sliding glass doors, adjustable shelves) are tempered 6mm thick glass with satin etched finish on one side

SPECIAL SIZES

- Custom widths, depths and heights are available, but require a custom quote. Please contact Customer Care for more information.
- Custom orders must indicate the "custom quote number" and list price as provided by Customer Care
- Changes to a custom quote are not permissible. Any revisions will necessitate a new quotation.

Planning Guidelines

To maintain design intent and most visually compatible design, ensure specifying **laminate end panel** products with other laminate end panel products, and likewise **metal leg** products with metal leg products. Components are interchangeable if required, however it is not recommended you mix laminate end panel and metal leg products.

Standard Finishes

Тор:		Base:		Door, Drav	wer and Cabinet Fronts
ACJ	Absolute Acajou	ACJ	Absolute Acajou	ACJ	Absolute Acajou
ASN	Asian Night	ASN	Asian Night	ASN	Asian Night
AWC	Avant Cherry	AWC	Avant Cherry	AWC	Avant Cherry
AWH	Avant Honey	AWH	Avant Honey	AWH	Avant Honey
DES	Dark Espresso	DES	Dark Espresso	DES	Dark Espresso
HGT	Hayden Grey	HGT	Hayden Grey	HGT	Hayden Grey
SKC	Shaker Cherry	SKC	Shaker Cherry	SKC	Shaker Cherry
TMA	Tiger Mahogany	TMA	Tiger Mahogany	TMA	Tiger Mahogany
TMP	Tiger Maple	TMP	Tiger Maple	TMP	Tiger Maple
TWL	Tiger Walnut	TWL	Tiger Walnut	TWL	Tiger Walnut
WCR	Winter Cherry	WCR	Winter Cherry	WCR	Winter Cherry
WHC	White Chocolate	WHC	White Chocolate	WHC	White Chocolate
WHT	White	WHT	White	WHT	White

Please specify a finish code for the **top**, **base** and **door**/ **drawer/cabinet front individually**. Please refer to the **Required Specifications** indicated on each page of the Princeton price book.

• Required finish option sequence: Top finish is always in the 1st position, Base finish is always in the 2nd position and Door/Drawer/Cabinet Front is always in the 3rd position.

Example:	PN3072DK	WHC	ACJ
	[model #]	[top]	[base]

PN2960CPL WHC ACJ WHC [model #] [top] [base] [drawer fronts]

Monopost Finishes

4" square monopost is standard in Tungsten (TUN) finish 1" x 2" met

Planters

Planter pots are standard in white. Available in Black (BK) at no upcharge. MUST SPECIFY at time of order placement.

Metal Frame Desk Legs

1" x 2" metal frame legs are standard in Tungsten (TUN) finish

Metal Frame Table Legs

1" x 2.5" metal frame legs are standard in Tungsten (TUN) finish

Design Guide Finish Specification

Тор	Base	Door / Drawer / Cabinet Fronts	Notes
Princeton Tables			
	n/a	n/a	Leg finish: Tungsten (TUN) only
Princeton Desks			
		n/a	 Leg finish: Tungsten (TUN) only Grommet finish: Satin Anodized only Bookcase adjustable shelf optional in satin-etched glass
Princeton Returns			
		n/a	Grommet finish: Satin Anodized only
	n/a	n/a	 Leg finish: Tungsten (TUN) only Grommet finish: Satin Anodized only
			Grommet finish: Satin Anodized
		n/a	only Bookcase adjustable shelf optional in satin-etched glass
Princeton Bridges			
		n/a	Grommet finish: Satin Anodized only
Princeton Conference Tops	l 	۱ 	
	n/a	n/a	 Leg finish: Tungsten (TUN) only Grommet finish: Satin Anodized only

Design Guide Finish Specification

Тор	Base	Door / Drawer / Cabinet Fronts	Notes
Princeton Credenzas			
			 Grommet finish: Satin Anodized only Pull finish: Satin Anodized only
			lf sliding glass door: Satin-etched glass only
Cushions for Credenzas and Mol	pile Storage		
	n/a	n/a	Specify fabric.
Princeton Cabinets and Towers			
			 Adjustable shelf optional in satinetched glass Pull finish: satin anodized only Accessory hook finish: Satin anodized only
			 Adjustable shelf optional in satinetched glass Pull finish: satin anodized only Accessory hook finish: Satin anodized only
			 Adjustable shelf optional in satinetched glass Pull finish: satin anodized only Accessory hook finish: Satin anodized only
Princeton Pedestals and Mobile	Storage		
			Pull finish: Satin anodized only


Design Guide Finish Specification

Тор	Base	Door / Drawer / Cabinet Fronts	Notes
Princeton Desktop Storage			
		n/a	Applicable to two high and three high only
			 If glass sliding door, satin-etched glass only Sliding pull finish: Brushed aluminum only
			 If glass sliding door, satin-etched glass only Sliding pull finish: Brushed aluminum only
Princeton Accessories			·
		n/a	
		n/a	Optional center adjustable shelf available in satin-etched glass finish
0000	00000	n/a	 Must specify plant pot finish. Optional center adjustable shelf available in satin-etched glass

Unless noted otherwise, width and depth range in 6" increments. *Not available in all widths/depths - refer to price list.

Product Map

Princeton Tables - 29"H

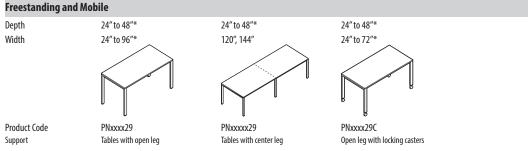

• 1"x 2.5" metal frame open leg, finished in Tungsten (TUN). Metal support channel(s) included on widths exceeding 54". 144" wide top in two pieces.


Princeton Desks - 29"H

Freestanding OR may also be used in overlapping configurations OR with flush connection to returns, bridges and conference tops

Desks with laminate end panels | Top and base finish(es) specified separately. Front and back worksurface overhang by 4" on 24"D models; 5" on 30"D models and 6" on 36"D models


Desks with metal frame | 1" x 2" metal leg, finished in Tungsten (TUN). Metal support channel(s) included on widths exceeding 54". Top and Bookshelf finish(es) specified separately. Bookshelf is 12" deep overall; middle shelf is adjustable.



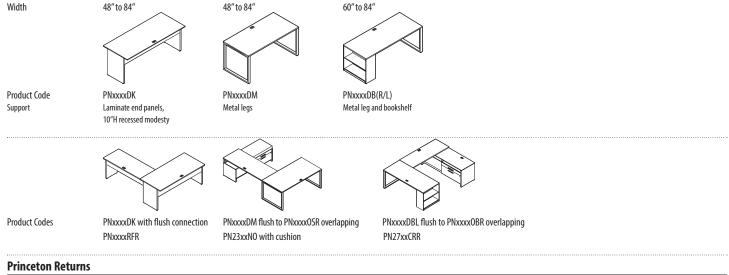

Returns with laminate end panels and modesty or bookshelf | Top and base finish(es) specified separately. Bookshelf is 12" deep overall; middle shelf is adjustable.


Returns with metal frame | 1" x 2" metal leg, finished in Tungsten (TUN). Metal support channel(s) included on widths exceeding 54".

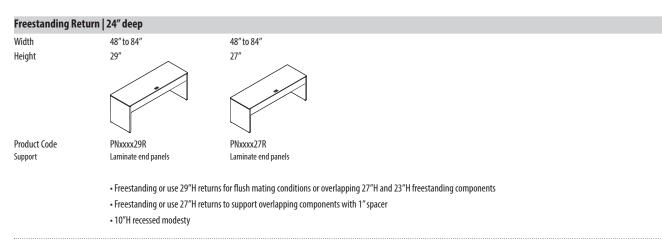

Design Guide Product Map

Princeton Returns - 29"H

Plusicationaction Physic 47: 97 T	Princeton Return	ıs - 29″H				
With Retronce Harts executed is the e	Flush Connection					
Pipt hard mathe It hard mathef It hard mathef	Depth	24", 30", 36"	24", 30", 36"	30", 36"	24", 30", 36"	
uthat a statisticProport (RA1) Metal legNetwork (RA1) Metal	Width	48" to 78"	48" to 78"	48" to 78"	48" to 78"	
unchase and the second seco						
unchase and the second seco	Right hand shown	*				
Product Code SeparatNitcode Signal, With mode top Metal lagPiccode Signal, With North Signal, With North Signal, North Signal, North Signal, With North Signal, North Signal, SeparatPiccode Signal, Signal, North Signal, North Signal, Nor		\sim	¥ I			
SupportMetal lagMetal lagMetal lagMetal lagBookhelfOverlapping Reture WH ** Spacer works with 2* HPoth24', 30', 36'24', 30', 36'24', 30', 36'Pith24', 30', 36'00'to 34'24', 30', 36'24', 30', 36'PithPith00'to 34'00'to 34'00'to 34'00'to 34'PithPithPith00'to 34'00'to 34'00'to 34'PithPithPith00'to 34'00'to 34'00'to 34'PithPithPithPithPithPithSupportPithPithPithPithPithPith9'to 34'00'to 34'00'to 34'PithPith9'to 34'00'to 34'PithPithPith9'to 34'00'to 34'PithPithPith10'to 34'00'to 34'P						
Developing Reture with 1° Spacer [works with 27 H components Depth 24', 30', 36' 24', 30', 36' 30', 16' 24', 30', 36' 24', 30', 36' Right Ame drawn Lith that studiek View Colspan="4">Of Colspan="4">Aff, 30', 36' 24', 30', 36' Signer 1 Phoces0(R/L) Inter Limits end alex Inter Limits end alex Inter Limits end alex Inter Limits end alex Inter Limits end alex Phoces0(R/L) Meal leg wedge top Phoces0(R/L) Meal leg wedge top Phoces0(R/L) Bookbef Overfapping Reture vitb 72'H colspacer I works vitb 22'H components Proces0(R/L) Inter Limits end alex Inter Limits end alex Inter Limits end alex 30', 36' Phoces0(R/L) Meal leg wedge top Phoces0(R/L) Bookbef Protecto Bridges Phoces0(R/L) Meal leg wedge top and 5' metal spacer Second 5' metal spacer Phoces0(R/L) Inter Limits end alex Second 5' metal spacer Protecto Bridges Phoces05(R/L) Meal leg wedge top and 5' metal spacer Second 5' metal spacer Second 5' metal spacer Protecto Bridges 1' Phoces05(R/L) Meal leg wedge top and 5' metal spacer Second 5' metal spacer Second 5' metal spacer Protecto Bridges 24', 30' 24', 30' Second 5' metal spacer Second 5' metal spacer Protecto Bridges 1' Phoces05' Phoces05' Second 5' metal spacer	Product Code	PNxxxxRF(R/L)	PNxxxxFM(R/L)		PNxxxxFB(R/L)	
Overlapping Return with "2" Spacer works with 2"" H components Deph 21', 30', 36' 31', 36' 30', 36' 21', 30', 35' Midth 72' to 84' 41', 91', 36' 81' to 94' 81' to 94' Fight And some tarbade with the actualitie Filter Scatter works with 2" H components Filter Scatter works with 2" H components Filter Scatter works with 2" H components Overlapping Return with 5" Metal Spacer works with 2" H components Filter Scatter works with 2" H components Filter Scatter works with 2" H components Deph 21', 30' 5' 80' 10' 6' 90' to 8'' Filter Scatter works with 2" H components Deph 21', 30' 5' 80' 10' 6'' 90' to 8'' 90' to 8'' Filter Scatter works with 2" H components Protector Bridges ProcessOS(0/L) Pr	Support		Metal leg	Metal leg, wedge top	Bookshelf	
Depth With Repth the sended24'; 30'; 36'' 60'' 10''30'; 36'' 60'' 10''24'; 30'; 36'' 60''24'; 30'; 36''24'; 30'; 36'' 60''24'; 30'; 36''24'; 30'; 36'' 60''24'; 30'; 36''24'; 30'; 36'' 60''24'; 30'; 36''30'; 36'' 60''30'; 36'' 60''30'; 36'' 60''30'; 36'' 60''30'; 36'' 60''30'; 36'' 60''30'; 36'' 60''30'; 36'' 60''30'; 36'' 60''30'; 36'' 		10"H modesty				
Depth With Repth the sended24'; 30'; 36'' 60'' 10''30'; 36'' 60'' 10''24'; 30'; 36'' 60''24'; 30'; 36''24'; 30'; 36'' 60''24'; 30'; 36''24'; 30'; 36'' 60''24'; 30'; 36''24'; 30'; 36'' 60''24'; 30'; 36''30'; 36'' 60''30'; 36'' 60''3	Overlapping Return	n with 1″ Spacer works with 2	7″H components			
With Right and alone to the the conduct Code SupportPlococh(R/L) Incot Limitate end panel, Intel manesesOffer B4" Plococh(R/L) Metal legOffer B4" Plococh(R/L) Metal leg, wedge tipBit on 94" Plococh(R/L) Plococh(R/L) Metal leg, wedge tipDiscoch(R/L) Plococh(R/L) BootheffOrterapping Returm to the transmite end panel, In 17 modestyOrterapping Returm to the transmite end panel, In 18 modestyOrterapping Returm to the transmite end panel, In 18 modestyOrterapping Returm to the transmite end panel, In 18 modestyOrterapping Returm to the transmite end panel, In 21 modestyPlocochO(R/L) In 21 modesty		-		30", 36"	24", 30", 36"	
tet hand advantate Product Code Support Product Sode Pr						
teth data valuate PN00000(R/L) lister Laminate end panel, 10°H moderny PN00000(R/L) Metal leg, wedge top PN00000(R/L) Bookhelf Coverlapping Reture weta-S''Metal Spacer works weta- lister laminate end panel, 10°H moderny OW0000(R/L) Metal leg, wedge top PN00000(R/L) Bookhelf Coverlapping Reture weta- Signer Metal Spacer works weta- lister and valuate D'' Metal Spacer works weta- d'' to 4'' Diversities Product Code Lister and valuate PN00000(R/L) G'' to 4'' Diversities Diversities Product Code Lister and valuate PN00000(R/L) G'' to 4'' Diversities Diversities Product Code Lister and valuate PN00000(R/L) G'' to 4'' PN00000(R/L) G'' to 4'' PN00000(R/L) G'' to 4'' PN00000(R/L) G'' to 4'' Product Code Lister and valuate PN00000(R/L) G'' to 5'' PN00000(R/L) G'' to 4'' PN00000(R/L) G'' to 4'' PN00000(R/L) G'' to 4'' Product Code Lister and valuate end panel ontiquetorie for laminate end panel ontiquetorie i chromestare end panel ontiquetorie for laminate end panel ontiquetorie i chromestare end panel onti		\frown	$\langle \rangle$	$\langle \rangle$		
tet thand available of the formed and and the formed and a space of th						
Product Code Support Processify (R/L) INT mode:ty ProcessOD(R/L/L) Metal leg ProcessOD(R/L) Metal leg ProcessOD(R/L) Metal leg ProcessOD(R/L) Metal leg ProcessOD(R/L) Metal leg ProcesSOD(R/L) Metal leg ProcesSOD(R/L			\sim			
Stoppert Inter Laminate end panel. 10 ¹¹ modestry Metal leg Metal leg, wedge top Bookhelf Overlapping Return with 5 rd Metal Spacer works 307, 30 ⁻ 307, 30 ⁻ 307, 30 ⁻ Depth 247, 307, 30 ⁻ 60 ⁻ to 84 ⁻ 60 ⁻ to 84 ⁻ 50 ⁻ Right hand shalle 00 ⁻ to 84 ⁻ 60 ⁻ to 84 ⁻ 50 ⁻ Product Code PhoorsSO(R/L) PhoorsSO(R/L) PhoorsSO(R/L) Support Metal leg, wedge top and 5 ⁻ metal spacer 50 ⁻ Princeton Bridges PhoorsSO(R/L) PhoorsSO(R/L) Edify 1 ⁻ 1 ⁻ Height 1 ⁻ 24 ⁻ , 30 ⁻ Joint Sides Joint Sides Joint Sides Product Code PhoorsSO(R/L) 1 ⁻ Height 1 ⁻ 24 ⁻ , 30 ⁻ Joint Sides Joint Sides Joint Sides Product Code PhoorsBF PhoorsBF Fer Laminate end panel configurations For Hendel Big configurations Joint Sides may also be used with pening For Hendel Big configurations Depth 1 ⁻ 27, 30 ⁻ Joint Sides may also be used with pening For Hendel Big configurations	Left hand available					
Support Inter Langiander end panel, 10°H modestry Metal leg Metal leg, wedge top Bookheff Overlapping Return with 5" Metal Spacer works with 23"H components 30", 30", 00" b 4", 00" b 4	Product Code	PNyyyyRO(R/L)	PNyyyyOM(R/L)	PNyyyyOT(R/L)	PNyyyyRB(R/L)	
Derla Spacer works with 23'H componentsDepth $24', 30', 36''$ $30', 36''$ Product Code $0'' 0 4''$ $0'' 0 4''$ Product CodePlocox SO(R/L)Plocox SI(R/L)Product CodePlocox SO(R/L)Plocox SI(R/L)Prince on BridgesHetal leg and 5' metal spacerPrince on Bridges $1'''$ Product CodePlocox SO(R/L)Product CodePlocox SO(R/L)Prince on BridgesPrince on BridgesProduct Code $0'' 0 54''$ Product Code $0'' 0 54''$ Product Code $0'' 0 54''$ Product CodePlocox B''Product CodePlocox B'' <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>						
Depth 24'', 30'', 36'' 30'', 36'' Width 60''to 84'' 60''to 84'' Fight hand hoom Image: Constrained in the second in		10"H modesty				
Depth 24'', 30'', 36'' 30'', 36'' Width 60''to 84'' 60''to 84'' Fight hand hoom Image: Constrained in the second in	Overlannin v Detro	n with 5% Motol Crossey Lucada				
With bit hand solume 60° to 84" 60° to 84" Bight hand solume Fried to 54" Fried to 54" Product Code Phocos SO(R/I) Phocos TS(R/I) Metal leg and 5° metal spacer Phocos TS(R/I) Metal leg and 5° metal spacer Phocos TS(R/I) Product Code Phocos SO(R/I) Bight 11" 1" Beght 14", 30" 24", 30" Vidth 36" to 54" 36" to 54" Product Code Phocos BF 56" to 54" Product Code Phocos BF Friend end panel configurations Product Code Phocos BF Phocos BF Produ Dig Bride <td< td=""><td></td><td></td><td>-</td><td></td><td></td><td></td></td<>			-			
Right hand above Let hand available Image: Construction of the system PhocostS(R/L) Product Code PixcocsSO(R/L) PhocostS(R/L) Support Metal leg and 5° metal spacer Metal leg wedge top and 5° metal spacer Friceton Bridges E E Fulsh Connection 11° 1° Height 11° 1° Depth 24°, 30° 24°, 30° Vidth 36° to 54° 24°, 30° Vidth 36° to 54° 57° Product Code PhocostBif metal spacer PhocostBif metal spacer Product Code PhocostBif metal spacer For comparison Product Code PhocostBif metal spacer 1° Product Code PhocostBif metal spacer PhocostBif metal spacer Product Co						
Let hand availablePNxxxxxXS(R/L) Metal leg and 5° metal spacerPNxxxxXS(R/L) Metal leg, wedge top and 5° metal spacerPrinceton BridgesFlush ConnectionHeight11°1°Pothocx 50(R/L) Metal leg, wedge top and 5° metal spacerPrinceton BridgesFlush ConnectionHeight11°24°, 30°24°, 30°24°, 30°24°, 30°24°, 30°24°, 30°26° to 54°2200Product CodePNxxxBF Product CodePNxxxBF For laminate end panel configuration For metal leg configurations For metal leg configurations For metal leg configurations For laminate end panel configurations For laminate end panel configurations For metal leg configurations For metal leg configurations For laminate end panel configurations For laminate end p	width	00 10 04	00 10 04			
Let hand availablePNxxxxxXS(R/L) Metal leg and 5° metal spacerPNxxxxXS(R/L) Metal leg, wedge top and 5° metal spacerPrinceton BridgesFlush ConnectionHeight11°1°Pothocx 50(R/L) Metal leg, wedge top and 5° metal spacerPrinceton BridgesFlush ConnectionHeight11°24°, 30°24°, 30°24°, 30°24°, 30°24°, 30°24°, 30°26° to 54°2200Product CodePNxxxBF Product CodePNxxxBF For laminate end panel configuration For metal leg configurations For metal leg configurations For metal leg configurations For laminate end panel configurations For laminate end panel configurations For metal leg configurations For metal leg configurations For laminate end panel configurations For laminate end p						
Product Code SupportPNxxxxS(R/L) Metal leg and 5" metal spacerPNxxxXS(R/L) Metal leg. wedge top and 5" metal spacerPrinceton BridgesFlush ConnectionHeight1"* * * * * * * * * * * * * * * * * * *	Right hand shown					
Support Metal leg and 5° metal spacer Princeton Bridges Flush Connection Height 1″ Peight 1″ 24″, 30″ 24″, 30″ Width 36″ to 54″ Vidth 36″ to 54″ Product Code PNoxxBF For laminate end panel configurations PNoxxBFM For metal leg configurations Fortapping Bridges rules ab used with 29″ treedenzas with opening Product Code 1″ 2″ Product Code NaxxBF For laminate end panel configurations PNoxxBFM For metal leg configurations Product Code NaxxBF For laminate end panel configurations PNoxxBFM For metal leg configurations Product Code NaxxBF For laminate end panel configurations PNoxxBFM For metal leg configurations Product Code NaxxBF For laminate end panel configurations PNoxxBFM For metal leg configurations Product Code NaxxBF For laminate end panel configurations PNoxxBFM For metal leg configurations Product Code NaxxBF For laminate end panel configurations PNoxxBF For metal leg configurations Product Code NaxxBF For laminate end panel configurations PNoxXBF For metal leg configurations Product Code NaxxBF For laminate end panel configurations PNoxXBF For laminate end panel configurations Product Code NaxXBF For laminate end panel co	Left hand available		¥.			
Support Metal leg and 5° metal spacer Princeton Bridges Flush Connection Height 11° Pethy 24°, 30° Vidth 36° to 54° Vidth 36° to 54° Product Code PNxxxBF For laminate end panel configurations bridges may also be used with 29° tr cedenzas with opening Protect The spacer jeworks with 27° tr cedenzas with opening						
Princeton Bridges Flush Connection Height 1" Depth 24", 30" 24", 30" 24", 30" Width 36" to 54" 36" to 54" 36" to 54" Product Code PNocxxBF For laminate end panel configurations - Bridges may also be used with 29"H credenzas with opening Preduct 11" Preduct Side Side Side Side Side Side Side Side				pacer		
Flush Connection Height 11" Depth 24", 30" Depth 24", 30" Vidth 36" to 54" Vidth 36" to 54" Product Code PNxxxxBF PNxxxxBF PNxxxxBFM For laminate end panel configurations For metal leg configurations • Bridges may also be used with 29"H credenzas Height 11" 2" Depth 24", 30" 24", 30"						
Height 11" 1" Depth 24", 30" 24", 30" Width 36" to 54" 36" to 54" Vidth 36" to 54" Vidth Vidth Vidth Vidth Vidth Vidth <th></th> <th>S</th> <th></th> <th></th> <th></th> <th></th>		S				
Depth 24°, 30°, 24°, 30°, Width 36° to 54°, 36° to 54°, Product Code PNxxxxBF For laminate end panel configurations - Bridges may also be used with 29° tredenzas with opening PNxxxxBFM For metal leg configurations Pverlapping Bridge with 1″ Spacer works with 27″ Depth 2″, 30°,	Flush Connection					
Width 36" to 54" 36" to 54" Vidth 36" to 54" Video 54" Product Code PNxxxxBF PNxxxxBF PNxxxxBF PNxxxxBF PNxxxxBFM For laminate end panel configurations For metal leg configurations • Bridges may also be used with 29"H credenzas with opening Overlapping Bridge with 27" Zer Height 11" 2" Depth 24", 30" 24", 30"						
Product Code PNxxxxBF PNxxxxBFM. For laminate end panel configurations PNxxxxBFM. For laminate end panel configurations For metal leg configurations • Bridges may also be used with 29"H credenzas with opening Overlapping Bridge with 27" Height 11" 2" Depth 24", 30" 24", 30"						
For laminate end panel configurations For metal leg configurations • Bridges may also be used with 29"H credenzas with opening Overlapping Bridge with 1" Spacer works with 27"H credenzas Height 11" Peth 24", 30"	Width	36" to 54"	36" to 54"			
For laminate end panel configurations For metal leg configurations • Bridges may also be used with 29"H credenzas with opening Overlapping Bridge with 1" Spacer works with 27"H credenzas Height 11" Peth 24", 30"						
For laminate end panel configurations For metal leg configurations • Bridges may also be used with 29"H credenzas with opening Overlapping Bridge with 1" Spacer works with 27"H credenzas Height 11" Peth 24", 30"						
For laminate end panel configurations For metal leg configurations Bridges may also be used with 29"H credenzas with opening Overlapping Bridge with 1" Spacer works with 27"H credenzas Height 11" Peth 24", 30"						
For laminate end panel configurations For metal leg configurations Bridges may also be used with 29"H credenzas with opening Overlapping Bridge with 1" Spacer works with 27"H credenzas Height 11" Peth 24", 30"			×			
• Bridges may also be used with 29"H credenzas with opening Overlapping Bridge with 1" Spacer works with 27"H credenzas Height 11" Depth 24", 30"	Product Code					
Overlapping Bridge with 1" Spacer works with 27"H credenzas Height 11" 2" Depth 24", 30" 24", 30"		For laminate end panel configuration:	s For metal leg configurations			
Height 11" 2" Depth 24", 30" 24", 30"		Bridges may also be used with 2	29″H credenzas with opening			
Height 11" 2" Depth 24", 30" 24", 30"						
Depth 24", 30" 24", 30"		-				
	WUUI	· · · · · · · · · · · · · · · · · · ·	~			
Right hand shown	Right hand shown					
Left hand available	Left hand available					
		V	*			
Product Code PNxxxxB0(R/L) PNxxxx0B(R/L) For laminate end panel configurations For metal leg configurations	Product Code					
ron nominate ena ponei configurations — ron metaricy configurations		i or ianniale ena parlei configuration:				

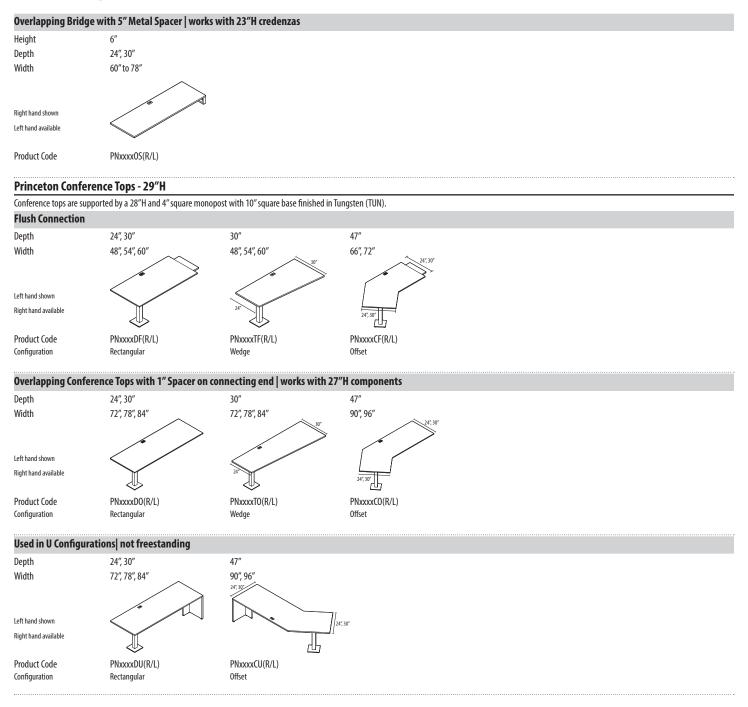

Design Guide

PRINCETON

Product Map

Product Code

Configuration

PN29xxNGS

Sliding Glass Doors, Narrow

PN29xxCGS


Sliding Glass Doors

Princeton Credenzas - 29"H

- Finish option specified for each zone of the credenza separately: Top | Base | Drawer and/or laminate door fronts
- Units with file drawers include file bars to accommodate front to back letter, legal or A4 filing. Lock is positioned on bottom file drawers; secures both drawers.
- Credenzas with sliding doors do not lock
- Credenzas with pull-out equipment shelf | shelf is rated for up to 80 lbs.

• Connection with flush or overlapping surfaces to credenza is only possible over units open on one side with either fixed lower shelf or pull-out equipment shelf

- Units open on one side (fixed or pull-out shelf) allow cables and cords to pass through back of lower shelf to floor monument
- Units with one open shelf/box/file drawer | open shelf interior height is fixed at 5.7"

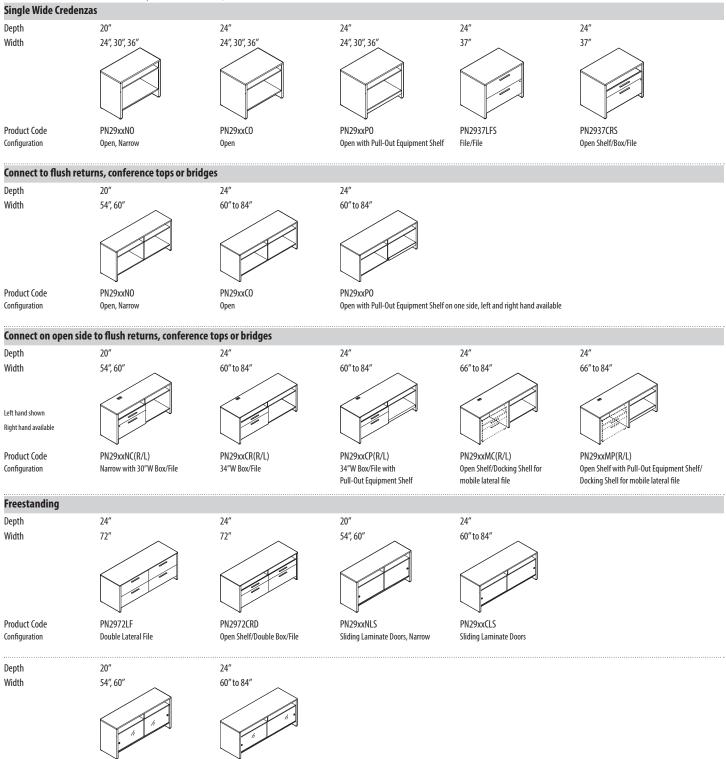


11

Princeton Credenzas - 27"H

- Finish option specified for each zone of the credenza separately: Top | Base | Drawer and/or laminate door fronts
- Units with file drawers include file bars to accommodate front to back letter, legal or A4 filing. Lock is positioned on bottom file drawers; secures both drawers.
- Credenzas with sliding doors do not lock
- Credenzas with pull-out equipment shelf | shelf is rated for up to 80 lbs.
- Units open on one side (fixed or pull-out shelf) allow cables and cords to pass through back of lower shelf to floor monument
- Units with open shelf/box/file drawer | open shelf interior height is fixed at 4"

Single Wide Credenzas

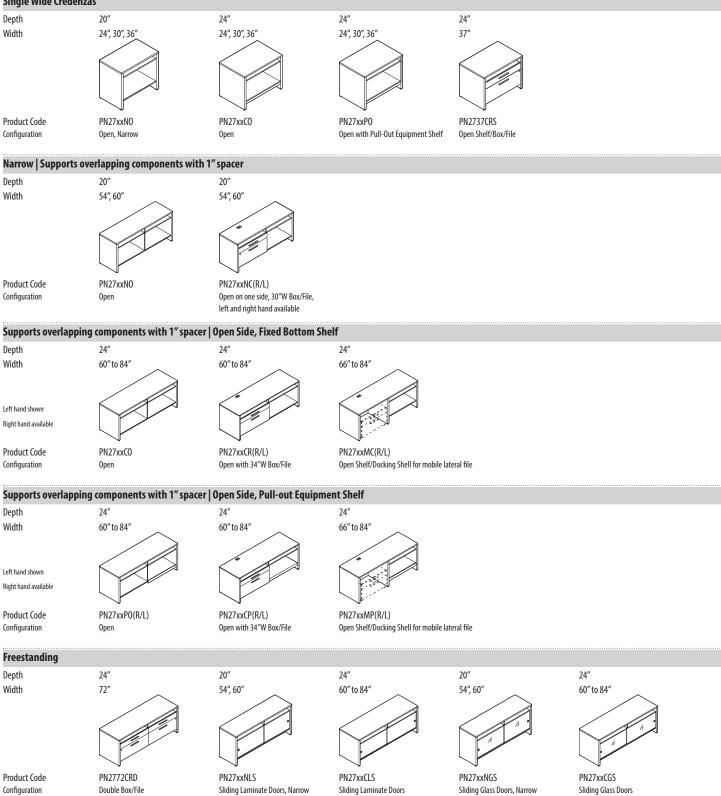


Princeton Credenzas - 23"H

• Finish option specified for each zone of the credenza separately: Top | Base | Drawer and/or laminate door fronts

• Units with file drawers include file bars to accommodate front to back letter, legal or A4 filing. Lock is positioned on bottom file drawers; secures both drawers.

• Credenzas with pull-out equipment shelf | shelf is rated for up to 80 lbs.

• Units open on one side (fixed or pull-out shelf) allow cables and cords to pass through back of lower shelf to floor monument

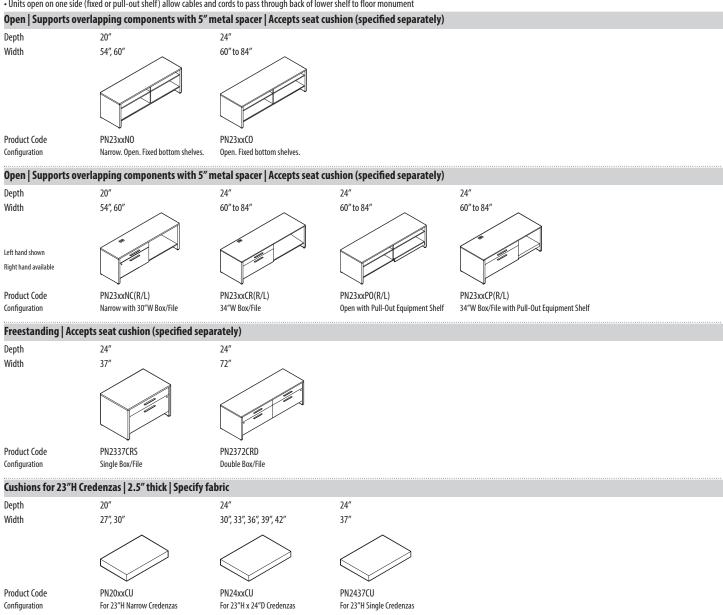

Princeton Storage Cabinets - 24"D

- Fixed bottom shelf of upper open shelves align with depth of worksurface for side access
- Finish option specified for each zone of the credenza separately: Top | Base | Drawer and/or laminate door fronts
- Cabinets with side access bookshelf | 52"H with one adjustable shelf, 66"H with two adjustable shelves Adjustable shelves may be specified in tempered glass
- Cabinets with file drawers accommodate front to back letter, legal or A4 filing. Lock is positioned on bottom drawer.
- ${\boldsymbol{\cdot}}$ Cabinets with full height wardrobes \mid wardrobe is locking ${\boldsymbol{\cdot}}$ coat rail included
- Cabinets with upper hinged door storage | hinged door is locking 52"H with one adjustable shelf inside; 66"H with two adjustable shelves inside

16″

27

Cabinets with recycling/waste drawer include one of each bin
 Recycling drawer is non-locking

52″H | Align with 27″H worksurfaces

18″

16″

27



Width

Width

Left hand shown

Right hand available

Product Code

Configuration


Left hand shown

Right hand available

Product Code

Configuration

Width



Product Code PN57CWB Configuration Wardrobe/Bookshelf





PN57DCSF(R/L) Upper storage with Open Shelf/File



PN57SBFT(R/L) Tower with wardrobe; Upper Storage, Open Shelf/Box/File PN57DRCS(R/L) Upper Storage with Open Shelf/ Recycling/Waste Drawer



PN57DTSF(R/L) Tower with wardrobe; Upper Storage, Open Shelf/File



PN57CSF(R/L)

Open Shelf/File/Bookshelf

16″

27

PN57TSBF(R/L) Upper Storage with Open Shelf/ Box/File and Bookshelf



PN57DRTS(R/L) Tower with wardrobe; Upper Storage, Open Shelf/Recycling/Waste Drawer



and Bookshelf

24″

27

16″



16″


PN57DSBF(R/L) Door/Upper Storage with Open Shelf/Box/File





PN57RTS(R/L) Tower with wardrobe; Open Shelf/ Recycling/Waste Drawer and Bookshelf


14


PN57TSF(R/L) Tower with wardrobe; Open Shelf/File and Bookshelf

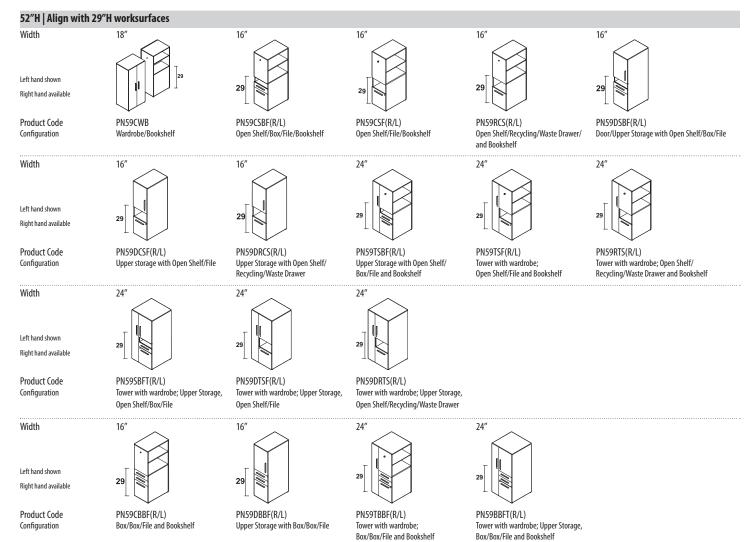

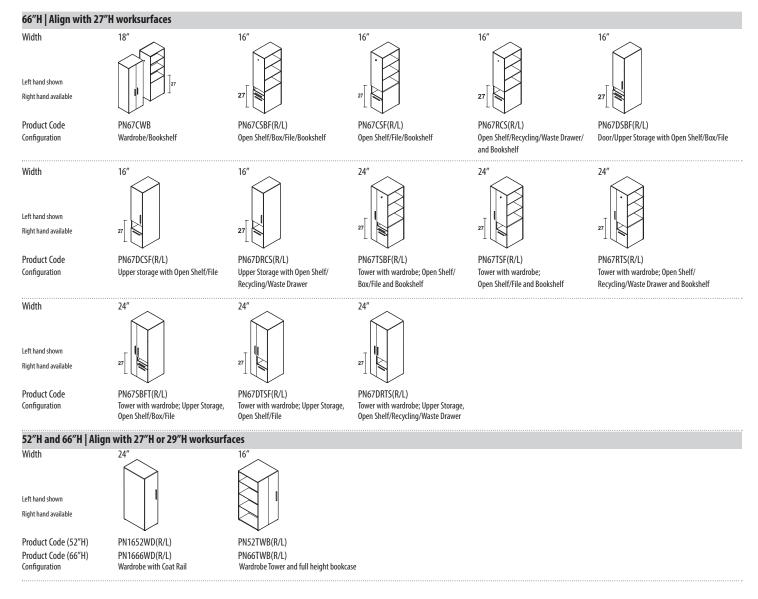

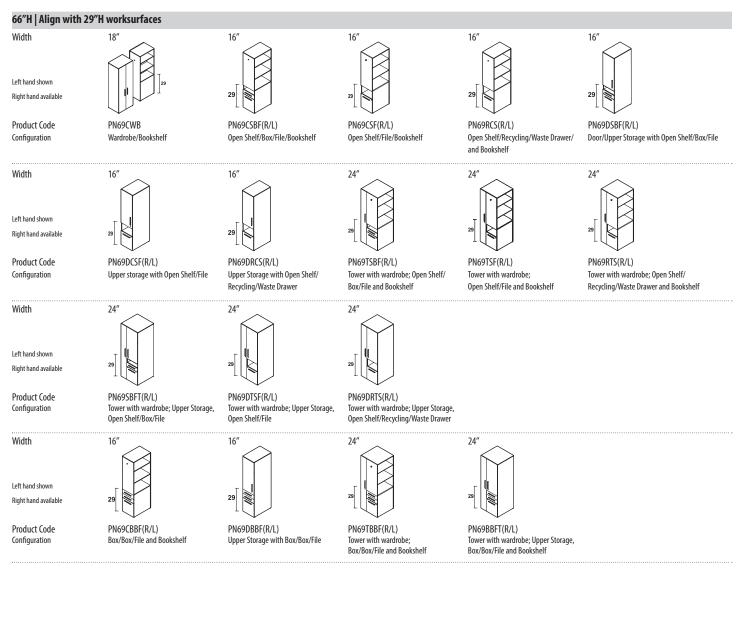

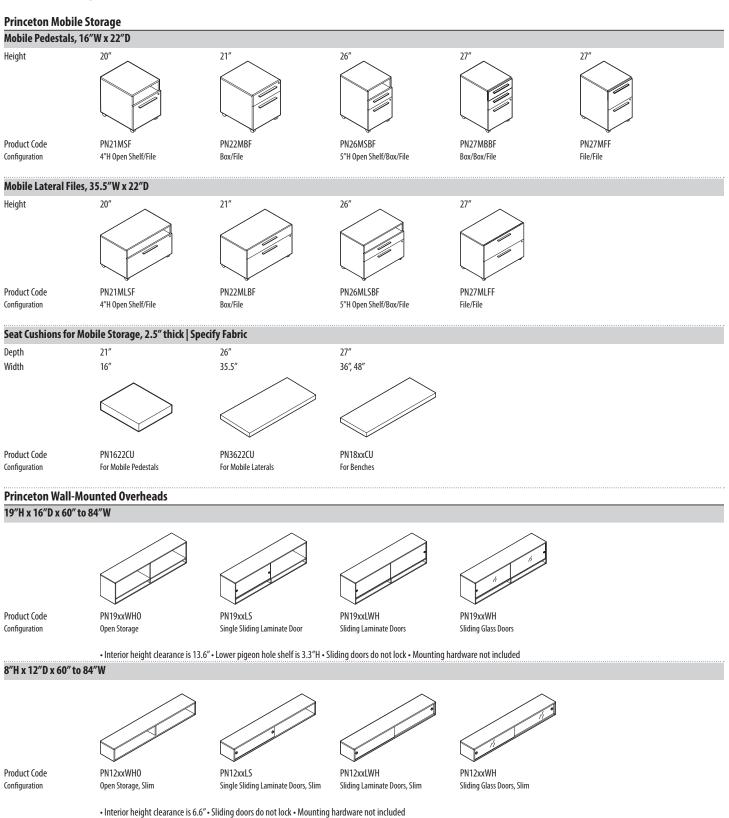

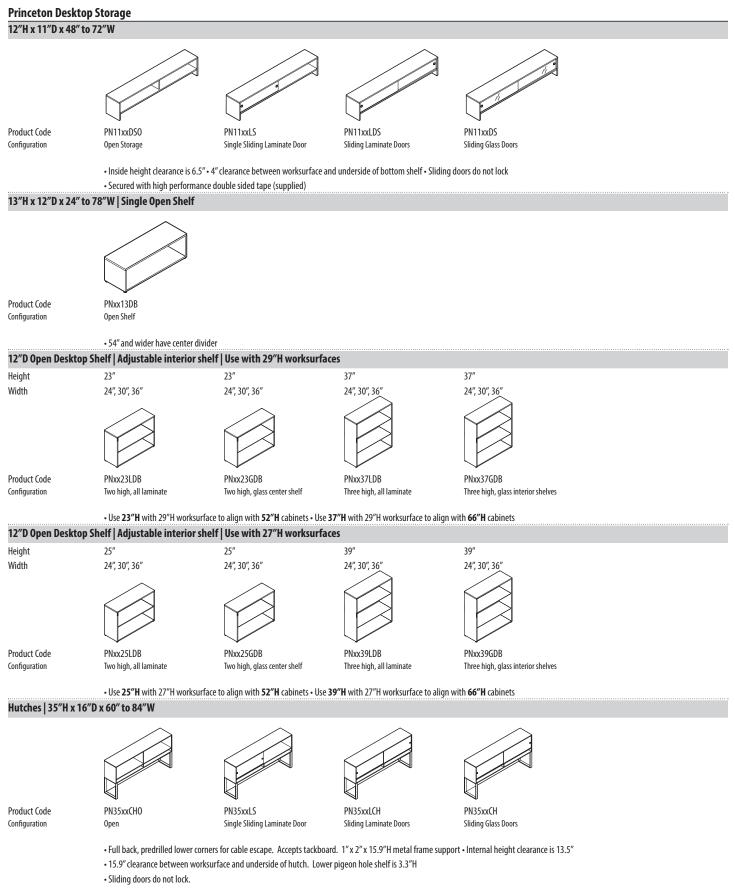

Princeton Accessories

13″ 13″ 8″ 14.5″ 14.5″ Height Depth 0.37" 0.25" 12″ 0.62" 0.62" 60″ to 84″ Width 30" to 78" 30" to 72" 60" to 84" 56", 62", 68", 74", 80" Product Code PNxx13DMF PNxx13DG PN12xxWHS PN15xxTBH PN15xxTBW Glass Desktop Panel Wall-Mounted Shelf Fabric Desktop or Modesty Panel Tackboard for Hutch Tackboard for Overhead Storage Configuration 17″ 17″ 19.5″ 14.5″ 29″ Height 12″ Depth 18″ 18″ 19″ 19″ Width 36", 48" 36" 48" 19″ 19″ 42", 72" PN18xxBN Product Code PN18xxBF PN1920ST PN1915RT PNxx29BGS Round Mobile Table Configuration Bench with Open Storage Bench with Lateral File Storage Mobile Stool with Cushion **Divider Shelves** 29″ 29", 52", 66" 29", 52", 66" Height Depth 12″ 12″ 12″ Width 15", 42", 72" 24", 30", 36" 24", 30", 36" Product Code PNxx29PL **PNxxxxBLS** PNxxxxBGS Configuration Planters Bookshelf with Laminate Shelves Bookshelf with Glass Shelves **Princeton Electrical Data** Height 2.22″ 0.5″ 2″ 2.22″ 2.22″ Depth 2.5″ 2.5″ 2.5″ 1.5″ 2″ 12", 20", 40' 12" to 66" (in 6" increments) Width 3.58″ 6.75″ 10.25" Ľ PGDPS20 PGDPS41

Product Code Configuration

2 Outlet Power Block

PGDPS21 2 Outlet, 1 Telecom Blank Plate

PLEDxx 4 Outlet, 1 Telecom Blank Plate Ultra Slim LED Task Light

PEWMx / PEWMx.x Wire Manager